


Performer Severe


Features

- Wet location certified when ceiling mounted
- Nylon or stainless steel latches available with tamper resistant screws
- For use in wet locations where moisture and washdown are prevalent
- 25°C ambient listed
- For use in outdoor, hosedown, and corrosive location, and high ambient conditions
- IP65 listed for dust-tight, hosedown, and outdoor
- UL1598A marine listed (optional) standard wet location
- Accessible drop-down ballast tray
- Listed as electrical enclosure for thru-branch wiring
- Conduit hubs available in die-cast aluminum or 316 stainless steel
- Mounting accessories in stainless or galvanized steel
- Ballast backup availability
- NEC/CEC-compliant ballast disconnect standard for appropriate models – see page 111

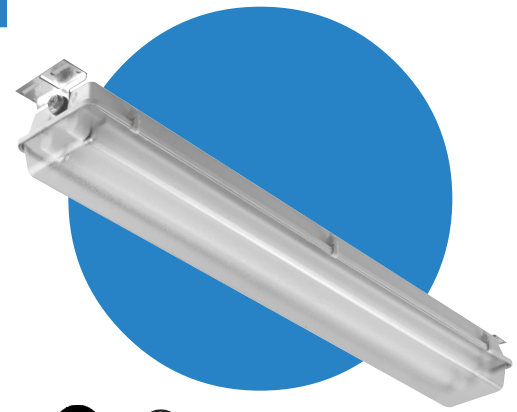

Ordering Information Example: FNPS4-428-EPU-2H-SSTP

FNPS

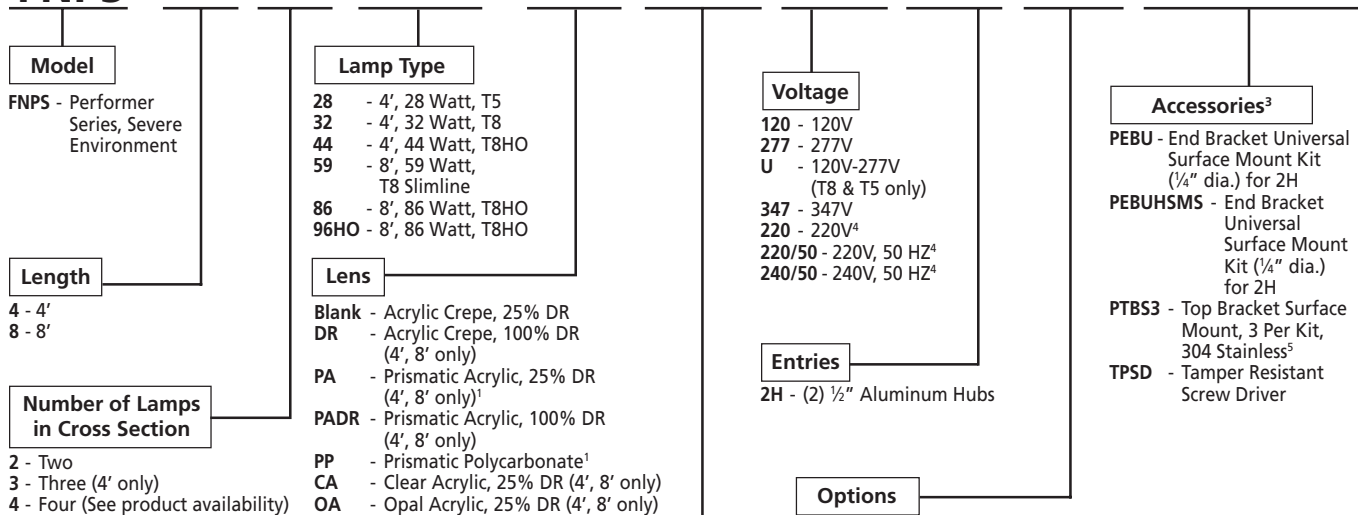


¹Wet location ceiling mount only (lens down).
²Ballasts may not be available in all combinations of lamp/voltage/starting temp/THD shown above.
³20 MM entries not CSA or ABS certified.
⁴Fusing not available.
⁵Recommend use of PTBS & PTBA accessories with stainless steel hubs.

Product Availability

Size	Lamps in Cross Section	Lamps in Fixture	Lamp Type	Width	Length	Height
4'	2	2	28	7 ⁹ / ₁₆ "	49 ¹³ / ₁₆ "	5 ⁵ / ₁₆ "
	2	2	28, 32, 44	7 ⁹ / ₁₆ "	49 ¹³ / ₁₆ "	5 ⁵ / ₁₆ "
	3	3	28, 32	7 ⁹ / ₁₆ "	49 ¹³ / ₁₆ "	5 ⁵ / ₁₆ "
	4	4	28	7 ⁹ / ₁₆ "	49 ¹³ / ₁₆ "	5 ⁵ / ₁₆ "
8'	2	2	59, 86, 96HO	7 ⁹ / ₁₆ "	97 ¹³ / ₁₆ "	5 ³ / ₈ "

Cross Sections

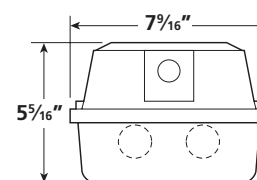

FNPS4

EXTREME ENVIRONMENT