

FSPH

Performer Series, Stainless Steel, Hazardous


Features



- For use in outdoor, hosedown, hazardous, and corrosive environments
- Ceiling, pendant, or wall mount
- Latches – captive, toggle action 304 SS
- Lens – tempered glass, high-impact acrylic or polycarbonate (non-hazardous)
- Gasket – one piece extruded silicone
- Bracket accessories – 304 SS
- UL844: Class I, Div. 2 Groups A,B,C,D (T-Code = T3C); Class II, Div. 2 Group G; Class III
- UL listed 1598 wet location
- Optional NEC/CEC-compliant ballast disconnect available – see page 111



Ordering Information Example: FSPH4-232-EU

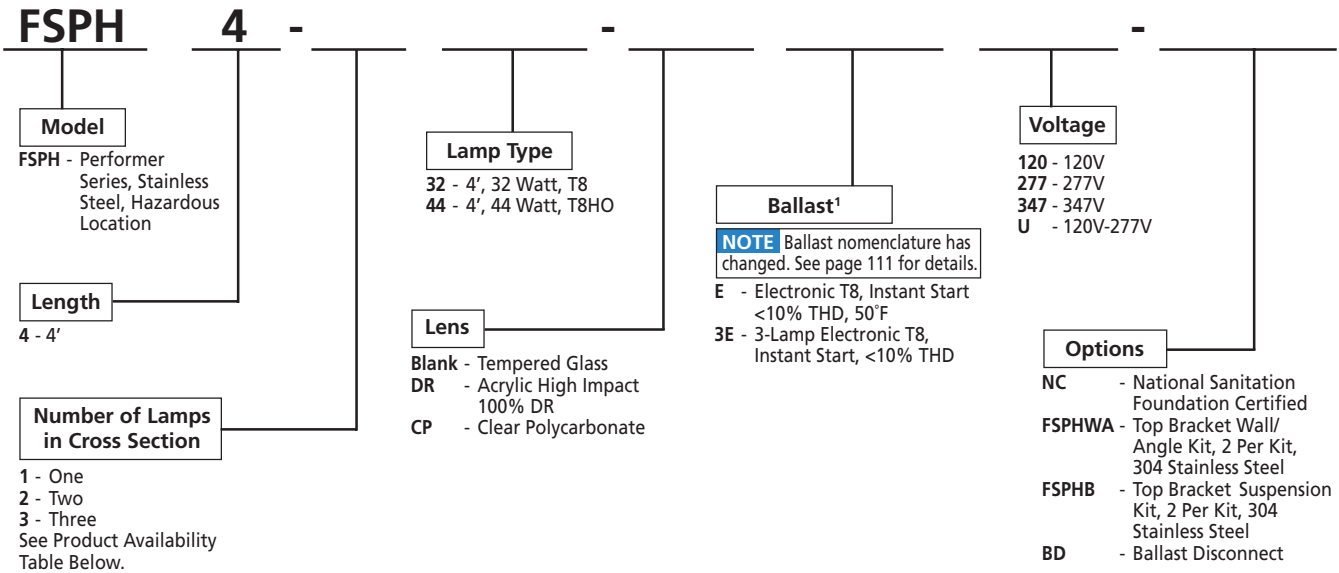

¹Ballasts may not be available in all combinations of lamp/voltage/starting temp/THD shown above.

Product Availability

Size	Lamps in Cross Section	Lamps in Fixture	Lamp Type	Width	Length	Height
4'	1	1	32, 44	8"	51 $\frac{3}{8}$ "	4 $\frac{5}{8}$ "
	2	2	32, 44	8"	51 $\frac{3}{8}$ "	4 $\frac{5}{8}$ "
	3	3	32	8"	51 $\frac{3}{8}$ "	4 $\frac{5}{8}$ "

Cross Sections

